

# MV-CH120-15TM/TC

12 MP 1.1" CMOS 10 GigE Area Scan Camera



GEN*i*CAM

10GigE  
VISION

## Introduction

MV-CH120-15TM/TC camera adopts Sony® IMX253 sensor to provide high-quality images with high resolution and low noise. It uses 10 GigE interface to transmit non-compressed data in real time, and its max. frame rate can reach 68.3 fps in full resolution.


## Key Feature

- Resolution of 4096 × 3000, and pixel size of 3.45 μm × 3.45 μm.
- Supports auto or manual adjustment for gain, exposure time, Gamma correction, LUT, etc.
- Adopts 10 GigE interface, compatible with GigE, and max. transmission distance of 100 meters.
- Compact design with mounting holes on panels for flexible mounting.
- Compatible with GigE Vision Protocol, GenlCam Standard, and third-party software based on the protocol and standard.

## Applicable Industry

SMT/PCB AOI, FPD, railway related application, etc.


## Dimension

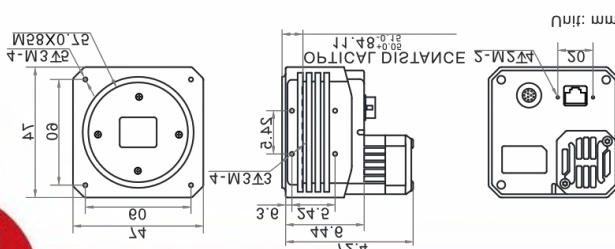


## Available Model

- M58-mount with fan, mono: MV-CH120-15TM-M58S-NF
- M58-mount with fan, color: MV-CH120-15TC-M58S-NF

## Sensor Quantum Efficiency

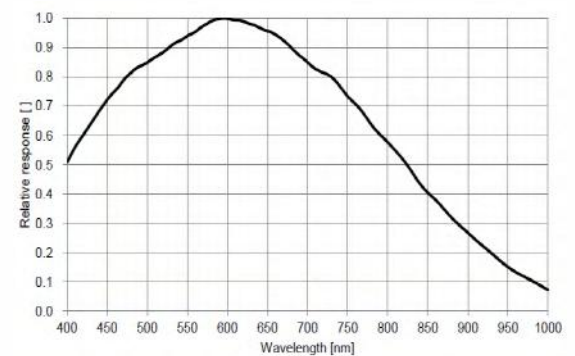

MV-CH120-15TM

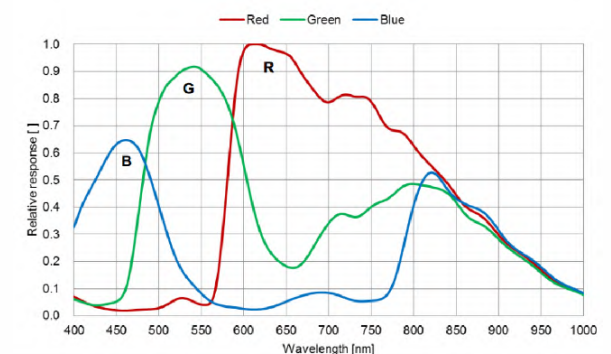

MV-CH120-15TC



# Specification

Model	MV-CH120-15TM	MV-CH120-15TC
<b>Camera</b>		
Sensor type	CMOS, global shutter	
Sensor model	Sony® IMX253	
Pixel size	3.45 μm × 3.45 μm	
Sensor size	1.1"	
Resolution	4096 × 3000	
Max. frame rate	68.3 fps @4096 × 3000	
Dynamic range	71.6 dB	
SNR	39.7 dB	
Gain	0 dB to 18 dB	
Exposure time	UltraShort exposure mode: 2 μs to 14 μs	
	Standard exposure mode: 15 μs to 10 sec	
Exposure mode	Off/Once/Continuous exposure mode	
Mono/Color	Mono	Color
Pixel format	Mono 8/10/10Packed/12/12Packed	Mono 8, Bayer RG 8, YUV422Packed, YUV422_YUYV_Packed, RGB 8, BGR 8
Binning	Supports 1 × 1, 1 × 2, 1 × 4, 2 × 1, 2 × 2, 2 × 4, 4 × 1, 4 × 2, 4 × 4	
Decimation	Supports 1 × 1, 1 × 2, 1 × 4, 2 × 1, 2 × 2, 2 × 4, 4 × 1, 4 × 2, 4 × 4	
Reverse image	Supports horizontal and vertical reverse image output	
<b>Electrical feature</b>		
Data interface	10 Gigabit Ethernet, compatible with Gigabit Ethernet	
Digital I/O	12-pin P10 connector provides power and I/O, including opto-isolated input × 1 (Line 0), opto-isolated output × 1 (Line 1), bi-directional non-isolated I/O × 1 (Line 2), RS-232 × 1	
Power supply	9 VDC to 24 VDC	
Power consumption	Typ. 9.6 W@24 VDC	Typ. 10.1 W@24 VDC
<b>Mechanical</b>		
Lens mount	M58-mount, optical back focal length: 11.48 mm (0.5")	
Dimension	74 mm × 74 mm × 72.4 mm (2.9" × 2.9" × 2.9")	
Weight	Approx. 550 g (1.2 lb)	
Ingress protection	IP40 (under proper lens installation and wiring)	
Temperature	Working temperature: 0 °C to 50 °C (32 °F to 122 °F)	
	Storage temperature: -30 °C to 70 °C (-22 °F to 158 °F)	
Humidity	20% to 95% RH, non-condensing	
<b>General</b>		
Client software	MVS or third-party software meeting with GigE Vision Protocol	
Operating system	32/64-bit Windows XP/7/10	
Compatibility	GigE Vision V2.0, GenICam	
Certification	CE, RoHS, KC	



Hangzhou Hikrobot Co., Ltd.  
en.hikrobotics.com

© Hangzhou Hikrobot Co., Ltd. All Rights Reserved.

Hangzhou Hikrobot does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice. All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.